Interpreter Booth Introduction

Whole set photo:





Parts Photos




Plexiglass
Double-layer
soundproof sponge






Static exhaust
Exhaust fan without sound
Let the air flow through the room

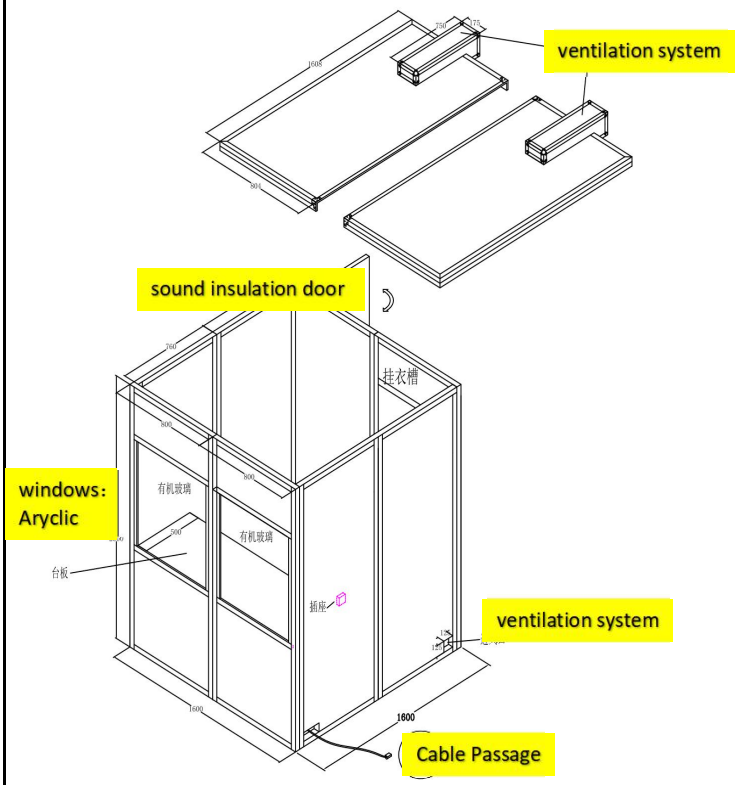



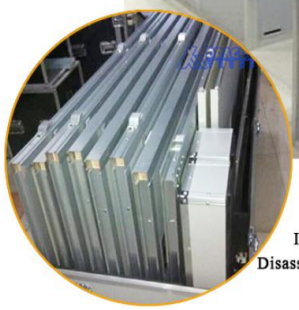

Easy to install
It doesn't take too much time to build
Disassembly requires only a small amount of space

Detail Date:

- Standard suited for 2 persons
- Standard size:W1600xD1600xH2000 mm
- Weight approx. 280KG
- Standard 11 panel configuration
- Ventilation system integrated in roof panels
- Outer Materials is high density plywood coated with fire-retardant paint
- White color, other colors are available on demand.
- Capacity of sound-proof

  The capacity of sound proof of our booth is completely over ISO-4043 standard, at least 30 dB

Configuration

1. sound insulation door: Easy opening 180 angle without noise; Outward;
2. windows: Size window is more than 700*800mm (H); Ample sight space;
   acrylic material (thickness 6mm; Anti-scratch; Prevent sharp light outside).
3. ventilation system: two silent ventilation system on top (optional), almost silence(< 40dB).
4. work surface can bear weight of all equipments
5. cable passage: Dia. 5cm
6. standard 8 wall panels(5 of which have windows with acrylic and 1 door panels),
   2 roof panels , 1 working table. the booth also have 2 cable ducts
7. Flight case packages.



